

Homopolymer Polypropylene

PHF0301



EVALENE® PHF0301 is a Homopolymer Polypropylene grade for biaxially oriented film (BOPP) applications.

EVALENE® PHF0301 is intended for the skin, intermediate and core layers of BOPP. **EVALENE® PHF0301** consistently delivers excellent transparency and good mechanical properties. Its superb optical properties guarantee eye-catching clarity and gloss for product imagery and branding opportunities. BOPP made with **EVALENE® PHF0301** exhibits good barrier properties.

FEATURES

- Outstanding optical properties
- Smooth surface finish
- Excellent tensile strength and barrier properties
- Meets FDA Philippines food-contact requirements
- Halal certified

TYPICAL APPLICATIONS

- Food and snack packaging
- Adhesive tape
- Cigarette packaging

Product Properties

Property	Test Condition	Test Method	Typical Value	Unit
Melt Flow	230°C/2.16 kg	ASTM D1238	3	g/10 min
Tensile Strength at Break*	500 mm/min	ASTM D882	137 / 304	MPa
Elongation at Break*	500 mm/min	ASTM D882	177 / 60	%
Elastic Modulus*	1% Secant	ASTM D882	1353 / 2526	MPa
% Haze*		ASTM D1003	1.10	%
Gloss*	60° angle of incidence	ASTM D2457	97	%

*Properties tested on 5-layer 20µ plain BOPP with 5:1 MD / 11:1 TD draw ratio.
Tensile properties are in machine and transverse directions (MD / TD).

Typical Processing Conditions

Extrusion Temperatures 170 - 250°C
Chill Roll Temperature 25 - 30 °C

BOPP made of **EVALENE® PHF0301** exhibits good haze and gloss that deliver excellent display value for the film.

Figure 1. Haze of 20 micron plain film made of **EVALENE® PHF0301** vs. customer's maximum requirement


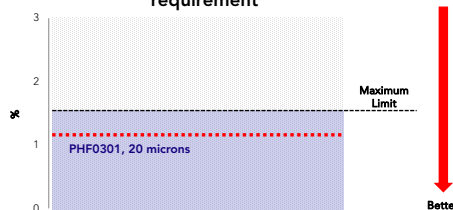


Figure 2. Gloss of 20 micron plain film made of **EVALENE® PHF0301** vs. customer's minimum requirement

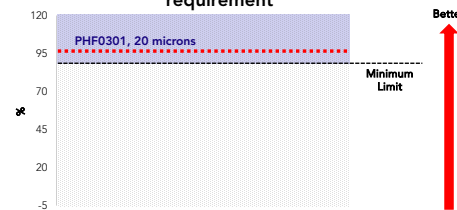

Tensile strength of BOPP made of **EVALENE® PHF0301** easily meets and surpasses minimum limits per customer requirement. Integrity and strength of a multilayer structure will be enhanced by a BOPP made of **EVALENE® PHF0301**.

Figure 3. Tensile strength in machine direction of 20 micron plain film made of **EVALENE® PHF0301** vs. customer's minimum requirement


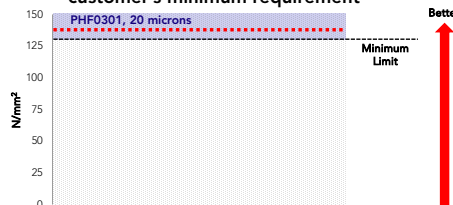


Figure 4. Tensile strength in transverse direction of 20 micron plain film made of **EVALENE® PHF0301** vs. customer's minimum requirement

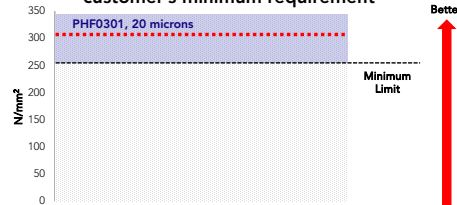

EVALENE® PHF0301's elastic modulus exceeds the customer's standard requirement. Multilayer structures that require outstanding stiffness will benefit from a BOPP made of **EVALENE® PHF0301**.

Figure 5. Elastic modulus in machine direction of 20 micron plain film made of **EVALENE® PHF0301** vs. customer's minimum requirement



Figure 6. Elastic modulus in transverse direction of 20 micron plain film made of **EVALENE® PHF0301** vs. customer's minimum requirement



Disclaimer:

Information provided herein is given for general purposes only. It is the customer's sole responsibility to test the product and any information provided herein to determine whether they are suitable for the customer's purposes. JGSPC MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS. Customers are strongly advised to review the applicable Material Safety Data Sheet before handling or using the product described herein.



Find out more about us at:
www.jgspetrochem.com



Better Life Through Innovation