

Linear Low Density Polyethylene



LF10181

EVALENE[®] LF10181 is a high slip, high antiblock Linear Low Density Polyethylene grade with butene (C4) as comonomer for blown film applications.

EVALENE[®] LF10181 is the resin of choice for tough flexible films. It exhibits a good balance of tensile and impact strength which makes it ideal for a wide range of film and packaging applications.

FEATURES

- Balanced toughness and flexibility
- Superior stiffness
- Good tear resistance
- Meets FDA Philippines food-contact requirements
- Halal certified

TYPICAL APPLICATIONS

- Flexible packaging
- Agricultural films
- Industrial liners
- Garment bags
- Trash bags
- Shopping bags
- Ice bags

Product Properties


Property	Test Condition	Test Method	Typical Value	Unit
Melt Index	190°C/2.16 kg	ASTM D1238	1.0	g/10 min
Density	23°C	ASTM D1505	0.918	g/cm ³
Tensile Strength at Yield*	500 mm/min	ASTM D882	9 / 8	MPa
Elongation at Yield*	500 mm/min	ASTM D882	61 / 22	%
Tensile Strength at Break*	500 mm/min	ASTM D882	11 / 10	MPa
Elongation at Break*	500 mm/min	ASTM D882	410 / 409	%
Tensile Modulus*	1% Secant, 25 mm/min	ASTM D882	167 / 159	MPa
Elmendorf Tear Strength*		ASTM D1922	197 / 406	g
Dart Drop Impact Strength*		ASTM D1709	79	g
% Haze*		ASTM D1003	13.5	%
Gloss*	45° angle of incidence	ASTM D2457	84	%
Coefficient of Friction - Static*		ASTM D1894	0.07	-
Coefficient of Friction - Kinetic*		ASTM D1894	0.05	-

*Properties tested on 25µ films made using a Killion extruder with 38mm screw, 3.5" die, 1.0mm die gap, at 2.25:1 BUR. Tensile and tear properties are in machine and transverse directions (MD / TD).

Typical Processing Conditions

Extrusion Temperatures	170 - 190°C
Blow Up Ratio	2 - 4
Die Gap	1 - 3 mm

Figure 1. Mechanical property performance of EVALENE® LF10181 vs. a 1.1 MI, 923 Density LLDPE material

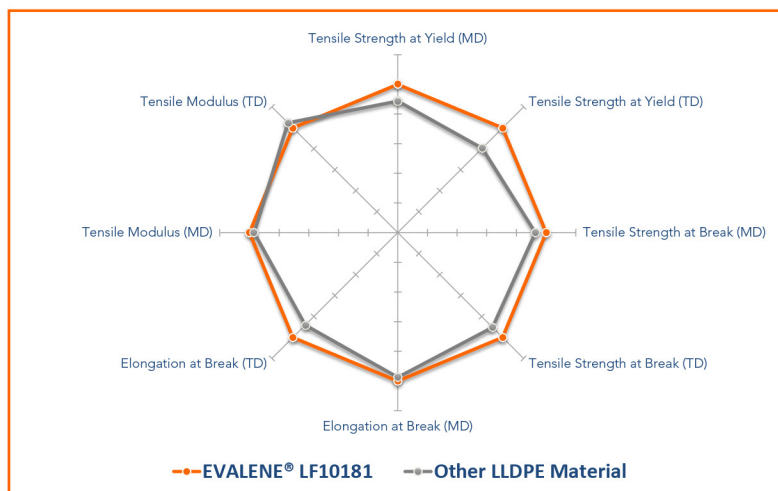

EVALENE® LF10181 exhibits a more balanced combination of mechanical properties compared to the 1.1 MI, 923 Density LLDPE grade. Specifically, it has superior tensile strength at yield which makes a film made of **EVALENE® LF10181** more resistant against dimensional changes and distortion. **EVALENE® LF10181** is suitable for tough flexible films.

Disclaimer:

Information provided herein is given for general purposes only. It is the customer's sole responsibility to test the product and any information provided herein to determine whether they are suitable for the customer's purposes. JGSPC MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS. Customers are strongly advised to review the applicable Material Safety Data Sheet before handling or using the product described herein.



Find out more about us at:
www.jgspetrochem.com